




# Statement of Volatility

Xerox® EX C60/C70 Print Server

Powered by Fiery®

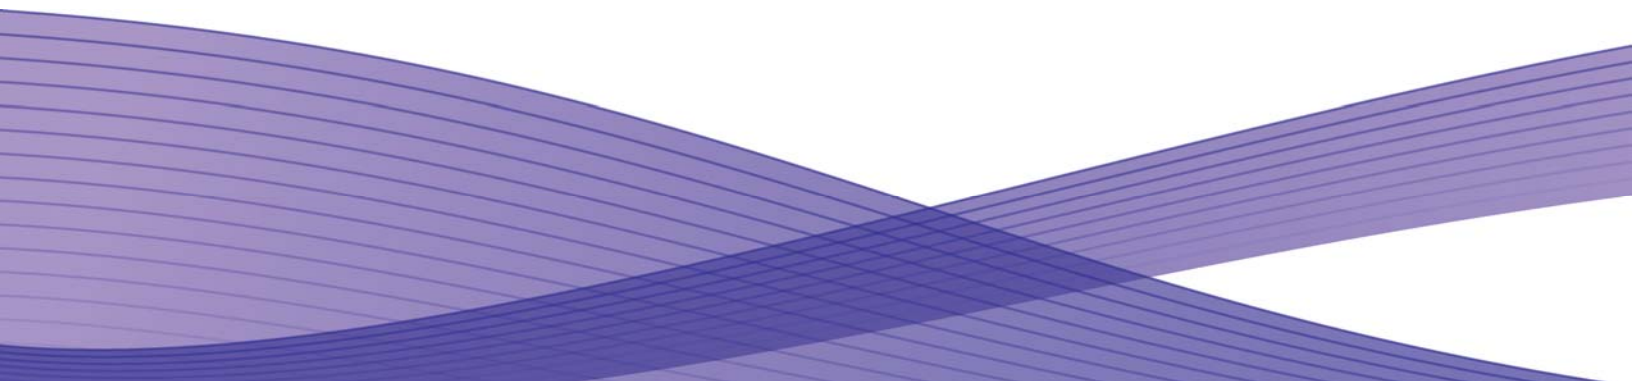

# Statement of Volatility

Xerox® EX C60/C70 Print Server

Powered by Fiery®

## Notice


This document describes the locations, capacities and contents of volatile and non-volatile memory devices within the Xerox® EX C60/C70 Print Server Powered by Fiery®

The context of the information in this document is that normal means of access or data extraction are being attempted in order to reproduce, individuals or organizations with advanced skills or through the use of extraordinary resources and measures or specialty equipment not normally available in the industry or to the public.

The content of this document is provided for information purposes only. Performance of the products referenced herein is exclusively subject to the applicable Xerox Corporation terms and conditions of sale and/or lease. Nothing stated in this document constitutes the establishment of any additional agreement or binding obligations between Xerox Corporation and any third party.

## Primary Signature Block

This evaluation and summary was completed by:

Signature	
Printed Name	Brian Dahlquist
Job Title	Manager, Hardware Platform Development
Job Function	Responsible for EFI Platform Hardware
Preparation Date	9/8/16

## Optional Signature Block

Signature	
Printed Name	
Job Title	
Job Function	
Preparation Date	

Copyright 2006, 2008 Xerox Corporation

Copyright protection claimed includes all forms and matters of copyrighted material and information now allowed by statutory or judicial law or hereinafter granted, including without limitation, material generated from the software programs that are displayed on the screen such as styles, templates, icons, screen displays, looks, etc.

XEROX®, The Document Company® and all Xerox product names and product numbers mentioned in this publication are trademarks of XEROX CORPORATION. All non-Xerox brands and product names may be trademarks or registered trademarks of the respective companies, and are hereby acknowledged.

Product appearance, build status and/or specifications are subject to change without notice.

# Statement of Volatility

Xerox® EX C60/C70 Print Server

Powered by Fiery®

## Introduction

The Xerox® EX C60/C70 Print Server Powered by Fiery® are used to perform the following tasks when attached to the Xerox Copier:

Printing and Scanning

This document describes the amounts and types of memory contained in the device in an easy to read tabular format. To allow security issues to be addressed as needed, specific commentary has been included about job data and where Personally Identifiable Information (PII) can be found in the system.

For larger Xerox systems that may contain multiple media feeders or multiple finishers, tabulated data is shown even though these devices never contain any job or PII data in electronic form. Also, in larger Xerox systems, another vendor may supply a Digital Front End (DFE) that is connected to the Xerox Print Engine. In these cases, the vendor of the DFE must provide their own Statement of Volatility for the hardware which comprises their additions to Xerox products.

The information contained in this document has been verified at the time the product is released for sale. Manufacturing process changes may require that memory amounts are increased but, the purpose or contents of the memory will not change.

## General Memory Information

### Volatile Memory

All volatile memory listed is cleared after power is removed (decay occurs generally within 20 seconds at room temperature).

All volatile memory listed is required for normal system operation and during service and diagnostic procedures.

Removal of any volatile memory will void the warranty.

### Non-Volatile Memory

All non-volatile memory listed is required for normal system operation and during service and diagnostic procedures.

Removal of any non-volatile memory will void the warranty.

All non-volatile memory cannot be accessed by accidental keystrokes (with exception of BIOS access keys).

## Hard Drive Information

### 1st Hard Drive / Partition Description

Complete this table if the device has media storage capability

Drive / Partition (System, Image):	Removable Y / N	Size:	User Modifiable: <input type="checkbox"/> Y / N	Function:	Process to Sanitize:
Main System Drive	N	1 TB	Y	System	Reinstall SW (which causes a reformat)
<b>Additional Information:</b> Drive contains multiple partitions, C partition is for service only and contains no data, D partition contains OS					

# Statement of Volatility

Xerox® EX C60/C70 Print Server

Powered by Fiery®

## System Descriptions

Volatile Memory				
Type (SRAM, DRAM, etc)	Size	User Modifiable (Y/N)	Function or Use	Process to Sanitize
DRAM	4 GB	Yes	Main System Memory	Power Off Server

Non-Volatile Memory				
Type (Flash, EEPROM, etc)	Size	User Modifiable (Y/N)	Function or Use	Process to Sanitize
Bios	16 MB (128 Mbit)	N	Bios Functions	Remove from socket and destroy, but system will cease to function
Ethernet Eprom	1 KB	N	Ethernet Chip Firmware	Desolder and destroy, but system will cease to function
CMOS NVRAM	256 Bytes	N	Bios Settings Storage	Remove System Battery for 30 seconds
Fiery QuickTouch®	1 GB	N	QuickTouch® OS and Fiery GUI Data and Apps	Desolder and destroy, but system will cease to function

Media and Storage					
Complete this table if the device has media storage capability					
Type (disk drives, tape drives, CF/SD/XD memory cards, etc.):	Removable Y / N	Size:	User Modifiable: <input type="checkbox"/> Y / N	Function:	Process to Sanitize:
Additional Information: Removable HDD Kit is available as an option. This kit simply moves the existing HDDs into a Removable Enclosure.					

USB	
Complete an entry for each USB port	
USB port and location	Purpose
6 Ports on I/O, 3 Ports on Fiery QuickTouch®, 2 Port Internally on MB (used by Fiery QuickTouch®), there are 4 additional ports on 9 pin headers which are not user accessible.	General Purpose, external ports are user accessible, internal ports are not. Bios settings can be modified to not allow booting from the USB port. Internal ports are not accessible by the user.

# Statement of Volatility

Xerox® EX C60/C70 Print Server

Powered by Fiery®

## System Descriptions (cont.)

RFID Devices	
Complete an entry for each RFID tag	
RFID Tag location	Purpose
None	N/A